


DAKORIT® ES 40B

Elastoplastic sealing paste for fast sealing and waterproofing

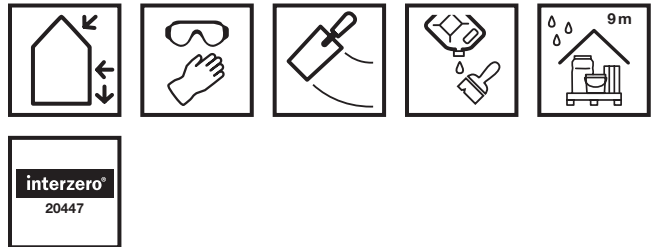

These pictograms apply to the **basic product**.
Deviations are possible depending on the area of application and processing.

PRODUCT INFORMATION

Description

DAKORIT® ES 40B is a high-quality elastomer-bitumen-based filler. It is highly resistant to weathering and aggressive atmospheres. Also adheres well under water.

Application

- for quickly sealing small leaks
- for filling joints and penetrations
- for bonding metal sheets to absorbent substrates

Operational area

- Flashings and terminations on roofing membranes, concrete, masonry, sheet metal, wood and similar substrates
- damp and dry substrates

Properties

- elastoplastic
- easy to process
- immediately adhesive
- immediately waterproof
- universal use

Technical Data

Available container sizes	12 kg/sheet metal bucket
Softening point	> +100 °C
Cold fracture (25 mm mandrel)	< -10 °C
Rain resistance	immediately
Curing time	approx. 1 mm / 24 hours ¹⁾
Storage	12 months
Consumption	approx. 1 kg/m ² per mm layer thickness

¹⁾ At +20 °C and 60 % relative humidity

SUBSTRATE

Properties/tests

- The substrate must be clean, sound and stable.

AREAS OF APPLICATION AND PROCESSING

Applying

- Apply DAKORIT ES 40B from the container using a trowel and smoothing trowel.
- At low ambient and substrate temperatures, processing is facilitated by keeping the filler warm.
- For higher loads, provide additional mechanical fastening of the sheets.
On steeply inclined or vertical surfaces, do not exceed a layer thickness of 3 mm per application.

NOTES

Cleaning

- Clean tools after use with HADALAN EPV 38L. Hardened material can only be removed mechanically.

System products

- HADALAN® EPV 38L

To be observed

- Contains flammable solvents.
- Apply a maximum thickness of 3 mm on walls.
- Store in a heated room at low temperatures for better processing.
- Press sheets into the adhesive bed before skin formation begins. Excessively long waiting times lead to reduced adhesion.

Ingredients

- bitumen
- polymers
- functional fillers
- fibers
- Adhesive
- Solvents

Occupational safety / Recommendation

- This product contains flammable solvents. Ensure adequate ventilation during processing. Avoid intensive inhalation of the vapors. Do not allow to enter sewers or groundwater. Further information on safety during transportation, storage and handling can be found in the current safety data sheets.

Disposal

- The following applies to all systems: Only return empty containers to recycling partner Interseroh. Hardened material residues can be disposed of according to EWC code no. 17 03 02 (bitumen mixtures with the exception of those falling under 17 03 01).

Producer

Sievert Baustoffe SE & Co. KG
Mühlenschweg 6, 49090 Osnabrück
Tel. +49 2363 5663-0, Fax +49 2363 5663-90
hahne-bautenschutz.de, info-hahne@sievert.de

The statements are made based on extensive tests and practical experiences. They cannot be applied to every application case. Therefore, we recommend carrying out application trials if necessary. Subject to technical changes in the course of further development. Furthermore, our General Terms and Conditions of Business apply.