


INTRASIT® SE-SB 10D

Mould-Ex – spore binder with 3-phase active system

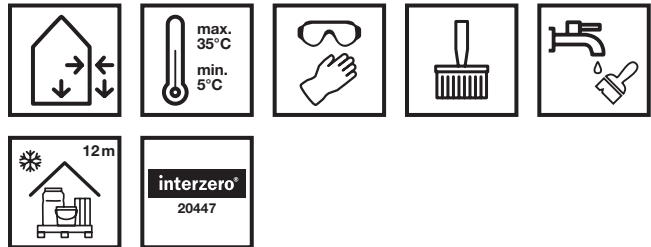

These pictograms apply to the **basic product**.
Deviations are possible depending on the area of application and processing.

PRODUCT INFORMATION

Description

INTRASIT® SE-SB 10D is a solvent-free, multi-stage primer. By using a particularly fine-particle, special binder combination, spores are securely bonded to the substrate. At the same time, a silicate binder strengthens the surface of the building material and increases its alkalinity. The hydrophobing agent contained in the product reduces the penetration of moisture into the substrate.

The spread of mould growth caused by flying spores, particularly during renovation work, is significantly reduced.

Application

- component of the Mold-Ex remediation system for binding mold spores to the substrate
- when removing the contaminated plaster or masonry, the release of spores into the room air is significantly reduced
- primer on newly created plaster surfaces, acts against new infestation by mold
- in the Mold-Ex remediation system, followed by the color design with INTRASIT SE-SF 70A

Operational area

- dry and slightly damp, absorbent, mineral substrates

Place of use

- horizontal and vertical surfaces

Properties

- binds mold spores and existing dust (abrasion, cement and quartz dust) to the mineral building material surface
- strengthens building material surfaces through silicate bonds
- reduces the penetration of moisture
- high penetration capacity due to special nanoscale combination of active ingredients
- ready-to-use
- chlorine-free
- acid-free

Technical Data

Available container sizes	5 kg/canister
Colour	white, transparent drying
pH value	approx. 11.5
Processing temperature	+5°C up to +35°C
Storage	frost-free and cool, 12 months
Consumption	approx. 0.2 – 0.3 kg/m ² depending on the absorbency of the substrate

SUBSTRATE

Suitable substrates

- Dry and slightly damp, absorbent, mineral substrates.

AREAS OF APPLICATION AND PROCESSING

Applying

- INTRASIT SE-SB 10D is ready to use and is applied undiluted to the substrate by brushing, rolling or spraying. Protect adjacent building components.
- Demolition work can begin after a drying time of approx. 30 minutes.
- If INTRASIT SE-SB 10D is used as a primer, INTRASIT SE-SF 70A can be applied directly after drying to a matt finish.

NOTES

Cleaning

- Clean tools immediately after use with water.

System products

- INTRASIT® RZ1 55HSP
- INTRASIT® RZ2 55HSP
- INTRASIT® SE-SL 18DD
- INTRASIT® SE-SF 70A

To be observed

- Protect adjacent components from splashes and spray mist.
- Do not apply to substrates saturated with water.

Ingredients

- Organic and inorganic binders
- Hydrophobic agents
- wetting agent

Occupational safety / Recommendation

- Further information on safety during transportation, storage and handling can be found in the current safety data sheets.

Producer

Sievert Baustoffe SE & Co. KG
Mühlenschweg 6, 49090 Osnabrück
Tel. +49 2363 5663-0, Fax +49 2363 5663-90
hahne-bautenschutz.de, info-hahne@sievert.de

The statements are made based on extensive tests and practical experiences. They cannot be applied to every application case. Therefore, we recommend carrying out application trials if necessary. Subject to technical changes in the course of further development. Furthermore, our General Terms and Conditions of Business apply.